


# Legacy 105-S

SELECTO QC350-S

System Part: Legacy 105-S (#QC350-S)  
Replacement Part: Legacy 105S-R (#QC350-2S)  
Rated Capacity (gallons) @ 2.2GPM Chlorine 8,000  
Flow Rate: 2.2GPM Chloramine 4,000  
Micron Rating: 1pm(NSF Class I)  
Min./Max. Pressure: 40-125psi  
Min./Max. Temp.: 40°-100°F  
Inlet/Outlet Size: 3/8" Barb Standard  
Shipping Weight: 4 LBS.  
Dimensions (W/D/H) 5/5/15.5"  
Includes Non-Corrosive Mounting Bracket

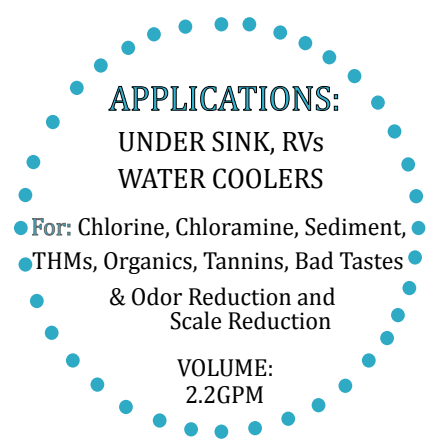

Reduce Equipment Maintenance Costs caused by Scale, Chlorine, Chloramine and Sediment.



## FILTER BENEFITS:

- Reduction of Chlorine, Chloramine, Bad Tastes and Odors, Total Organic Compounds, Tannins, Trihalomethanes and Scale Reduction.
- 30 times the Chloramine reduction of a Conventional Carbon Block!
- Sanitary Quick Change Cartridge Design for easy Cartridge Replacement.

## DRINKING WATER CHARACTERISTICS FOR FILTER APPLICATION:

Maximum Chlorine influent: 5PPM  
Maximum Chloramine influent: 2PPM  
Maximum TOC influent: 3PPM  
Maximum Hydrogen Sulfite: 2PPM  
Maximum Iron: 3PPM  
Maximum Organic Nitrogen: .5PPM

## TECHNOLOGY:

Moulded High Porosity Hollow Carbon with Micro-structure & Carbon Fiber Technology with Radial Flow

DO NOT USE WITH WATER THAT IS MICROBIOLOGICALLY UNSAFE OR OF UNKNOWN QUALITY.

\* Independently tested by and EPA approved laboratory to ANSI/NSF Standard 42 specifications for the reduction of Particulate Class I, Chlorine, Chloramine, taste & odor.  
\* Field tested by Selecto for the reduction of Standard 53 Cysts, MTBE, VOCs, THMs.



**selecto**

3980 LAKEFIELD COURT, SUWANEE, GA 30024 USA  
800-635-4017 EXT 3 678-475-0799 EXT 3

770-532-4743 678-936-1274